

### Features:

- ◇ Space saving design only 1.4" (35.6mm) deep
- ◇ Occupies less than 2.5 x 1.1 inches of front panel space
- ◇ High contrast LCD
- ◇ 3½ digits with 0.39" LCD
- ◇ Snap-In bezel eliminates the need for mounting hardware
- ◇ User Selectable Decimal Points
- ◇ Process input (4 to 20mA) adder board with multi-turn SPAN (GAIN) and ZERO (OFFSET) adjustments
- ◇ Loop powered

### Specifications:

<b>Display:</b>	Digits:	3 ½ digits (±1999 counts)
	Type:	0.39" (10mm) high contrast reflective LCD
	Polarity:	automatic, "-" displayed.
	Decimal Points:	3 position, user selectable
<b>Inputs:</b>	Overrange:	three lower order digits blank for inputs >1999 & < -1999
	Ranges:	process inputs, 4 to 20 mA
	Configuration:	bipolar, differential
	Protection:	30 mA max.
<b>Performance:</b>	Loop Burden:	300Ω nominal @ 20 mA DC (loop powered)
	Accuracy:	±(0.1% + 1 counts) typical ±(0.2% + 2 counts) maximum
	Conversion Rate:	3 per second
	Normal Mode Rejection:	>30 dB @ 60 Hz
	Adjustments:	automatic
	Warmup:	10 minutes typical
<b>Environment:</b>	Operating Range:	0 to 50 °C
	Storage Range:	-10 to 60 °C
<b>Power Supply:</b>		powered by the 4-20mA current loop
<b>Mounting:</b>	LCD:	snap-in bezel mount
	Process Board:	plugs onto DPM pins, adds approx. 0.6"(16mm) to depth
<b>Connection:</b>		screw terminals on process board

### Ordering Information:

**PART NUMBER**

LPI-1T.....4 to 20mA Loop Powered

PW2-24.....Regulated 120V AC to 24V DC Power Supply


# LCD Digital Panel Meter

3½ Digit LCD with adder board for process inputs




# LPI-1T

## Dimensions

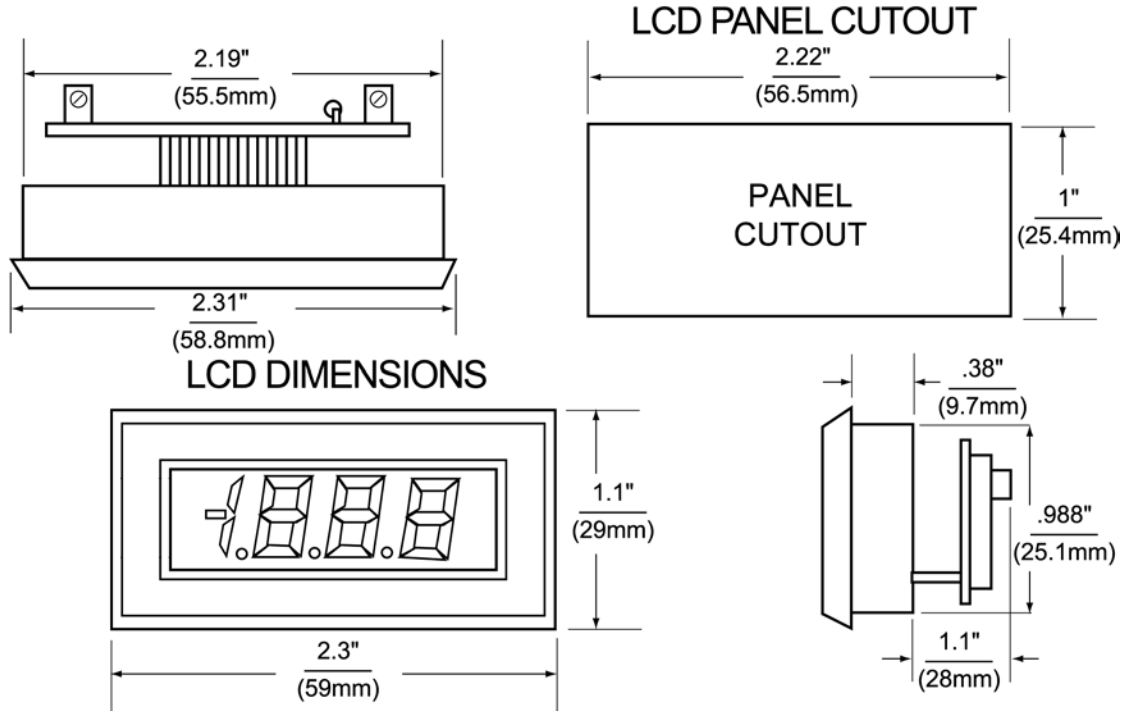


## Wiring

### 1. DECIMAL SELECTION:



### 2. J1, J2, J3 SELECTION:

**IF:** OFFSET (ZERO) IS 0 or  
 OFFSET (ZERO) > 0 **and** GAIN (SPAN) ÷ OFFSET (ZERO) ≥ 5



**IF:** OFFSET (ZERO) > 0 **and** GAIN (SPAN) ÷ OFFSET (ZERO) < 5

