



**No Backlight
Window Mount**

Features:

- ◇ Low-cost, high-performance replacement for many OEM DPMs
- ◇ Optional RED, GREEN or AMBER backlighting
- ◇ Window mount
- ◇ Resistant to RF and EMI
- ◇ 3½ digits with high-contrast LCD
- ◇ 4- 20 mA loop powered input
- ◇ User selectable, displayed engineering units

Specifications:


Display:	Digits:	3 ½ digits (±1999 counts)
	Type:	0.45" (11.4 mm) 7 segment LCD
Backlighting:		Optional Red Negative (red numbers/black background) Optional Green Negative (green numbers/black background) Optional Amber Negative (amber numbers/black background) Optional Green Positive (black numbers/green background)
	Polarity:	automatic, "°" displayed
	Annunciators:	°F, °C, PSI, % , user selectable
	Decimal Points:	3 position, user selectable
	Overrange:	three lower order digits blank for inputs >1999 & < -1999
Inputs:	Ranges:	4-20 mA DC
	Configuration:	bipolar differential
	Impedance:	300Ω nominal
Performance:	Accuracy:	±(0.1% fs + 2 count)
	Conversion Rate:	3 per second
	Normal Mode Rejection:	>30 dB @ 60 Hz
	Common Mode Range:	±1V DC max
	Common Mode Rej.:	>86 dB
	Adjustments:	span (gain) and zero (offset)
	Warmup:	10 minutes typical
	Temperature Coeff.:	± 100 ppm per °C typical
Environment:	Operating Range:	0 to 50 °C
	Storage Range:	-20 to 70 °C
Power Supply:		powered by the milliamp control loop
	Optional Backlight:	24 VDC at 35 mA typical
Mounting:		window mount
Connection:		2 screw terminal (4 with backlight)

Ordering Information:

PART NUMBER	BACKLIGHT COLOR	BACKLIGHT POWER
LPI-3EW	NO BACKLIGHT	NONE
LPI-3EANW	NEG AMBER	24VDC
LPI-3EGNW	NEG GREEN	24VDC
LPI-3ERNW	NEG RED	24VDC
LPI-3EGPW	POS GREEN	24VDC


PW2-24.....Regulated 120V AC to 24V DC Power Supply

Dimensions

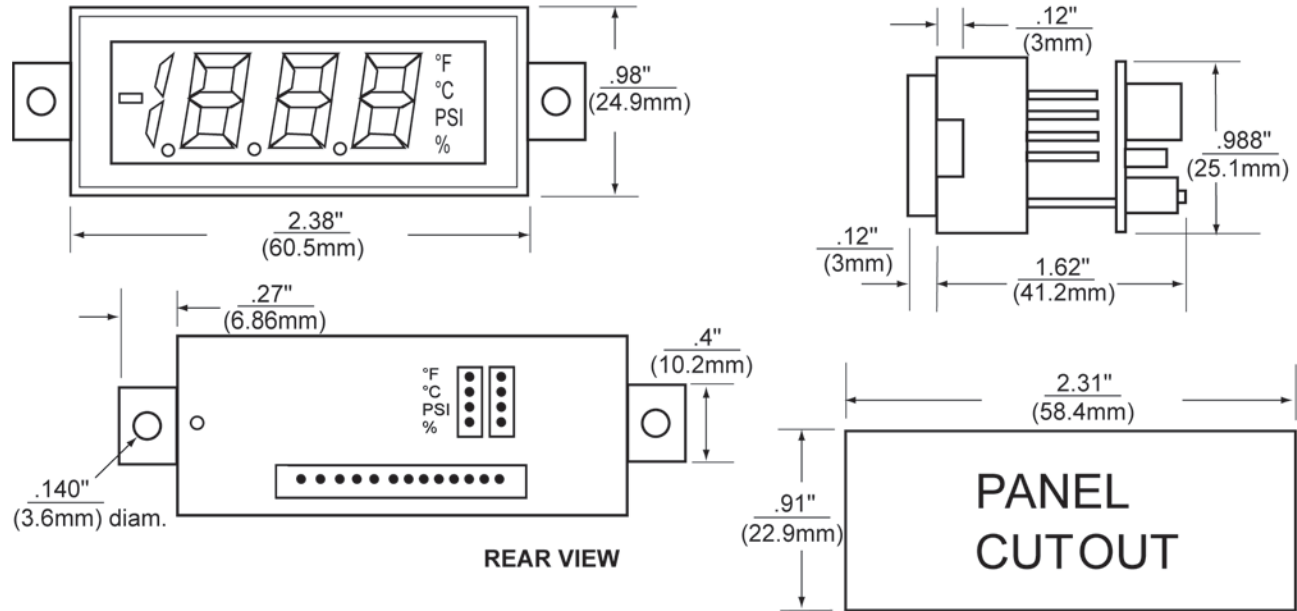


Jumper Selection & Wiring

1. DECIMAL SELECTION:





2. J1, J2, J3 SELECTION:

IF: OFFSET (ZERO) IS 0 or
 OFFSET (ZERO) > 0 and GAIN (SPAN) ÷ OFFSET (ZERO) ≥ 5



IF: OFFSET (ZERO) > 0 and GAIN (SPAN) ÷ OFFSET (ZERO) < 5

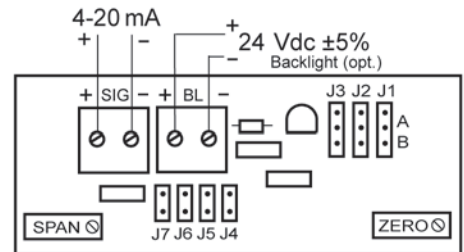

WIRING